



Ultimate Ownership Experience is our commitment to our customers.



HINO EDGE
Hino Trucks is raising the bar once again in customer ownership experience with the introduction of Hino Edge, the company's all-new, third generation connected vehicle solution. Hino Edge synergizes the digital connection between the fleet customer, dealer network, Telematics Service Providers, and Hino Ultimate Support Center, to provide customers a competitive edge.



HINOWATCH
24/7 Roadside Assistance is standard for 3 years, unlimited miles, on all Hino Trucks. HinoWatch also provides support for lockout, out of fuel, battery jumpstart, and warranty towing.



HINOCARE
Preventive maintenance saves money and increases uptime across your entire fleet. HINOCARE multi-year programs mean you can match your needs with your long term goals for cost management.



5 YEAR TRANSMISSION WARRANTY
Hino Trucks' L Series and the XL Series offers a five year warranty when purchased with the Allison transmission compared to three/four years standard. That means up to two extra years of warranty, unlimited mileage, free of charge. (Applies to MY20 and newer).

*Allison RDS Transmission, two years extension
*Allison HS Transmission, one year extra extension.



INCLUDEV
EV ENABLEMENT INCLUDEV has brought together the industry's top experts in everything EV. Unified, we're able to deliver everything needed to electrify fleets. Includes EV Trucks, charging stations, EV infrastructure, construction, end-to-end financing and operations support. This is the definition of "Turn Key" and you get to do it with some of the best partners in the EV market.

WARRANTY COVERAGE

MY24 HINO XL SERIES TRUCK - XL7 / XL8

DESCRIPTION	STD/OPT	MONTHS	MILEAGE
BASE VEHICLE WARRANTY Provides warranty coverage against defects in material and workmanship. Includes towing to the nearest Hino dealer for warrantable failures. Adjustments and expendables items are covered for 90 days / 3,000 miles. Batteries are covered for 12 months/unlimited mileage. <small>*Base vehicle warranty covers non - Cummins components</small>	STD.	24	UNLTD.
Cummins ENGINE AND AFTERTREATMENT SYSTEM WARRANTY The base warranty for Cummins B6.7 is 3 years / unlimited mileage and covers virtually everything, including parts and labor on warrantable failures. <small>*For details about the B6.7, see your local Hino dealer, or visit cummins.com.*</small>	STD.	24	250,000
7 YEAR WARRANTY EXTENDED ENGINE WARRANTY - 3 TO 7 YEARS (OPTIONS) Extended coverage plans are available with options for up to 7 years or 300,000 miles on all registered parts and labor. <small>*Most popular plan options shown, for details about the B6.7, see your local Hino dealer, or visit cummins.com.*</small>	OPT. OPT. OPT. OPT. OPT. OPT.	60 60 60 72 72 72	200,000 250,000 300,000 150,000 200,000 250,000
EPA BASE EMISSIONS SYSTEM WARRANTY - 5 YEARS / 100,000 Miles Provides warranty coverage against defects in material and workmanship for all components that comprise the emissions system. CARB Certified engine emissions warranty of 5 year/150,000 miles.	STD.	60	100,000
EXTENDED AFTERTREATMENT SYSTEM WARRANTY UP TO TO 6 YEARS (OPTIONS) Options range from 3 to 6 years and 100,000 to 250,000 miles. Mileage range options may vary by engine and length of coverage. <small>*Most popular plan options shown, for details about the B6.7, see your local Hino dealer, or visit cummins.com.*</small>	OPT. OPT. OPT. OPT. OPT. OPT.	60 60 60 72 72 72	200,000 250,000 300,000 150,000 200,000 250,000
FRAME RAILS & CROSS MEMBERS Provides warranty coverage against structural cracks in the frame caused by defects in material and workmanship	STD.	60	UNLTD.
CAB Provides warranty coverage against corrosion perforation of the cab structure.	STD.	60	UNLTD.
Allison 5 YEAR WARRANTY ALLISON AUTOMATIC TRANSMISSION- 5 YEARS (STANDARD) Limited Warranty includes 100% parts and labor for the coverage period. Repairs are performed at Allison Authorized Dealers.	STD.	60	UNLTD.
ANTI-LOCK BRAKING SYSTEM (ABS) AIR/HYDRAULIC ABS control module, modulator valves, and wheel sensors.	STD.	36	300,000

OPT. - Optional Warranties can be purchased from an authorized Hino Dealer. Hino reserves the right to amend all warranty terms and conditions.



POWER ON.

The Hino Trucks' conventional models have been the fastest growing medium duty trucks for years. It started with great aerodynamics, functionality and durability, and has continued with leading edge connectivity. The great just got better. The Hino XL Series sports an all-new automotive grade interior, a host of new advanced safety equipment, and larger cab configurations for more versatility than ever before.

Available in day, extended and crew cab configurations, Hino XL Series trucks are ideal for applications ranging from 33,000 lbs. to 62,000 lbs. GVWR. - POWER ON.

XL SERIES

MY24 - XL7/XL8



Hino Trucks - A Toyota Group Company
45501 12 Mile Road, Novi, Michigan 48377

MY24L SERIES_0223



HINO.COM

XL SERIES - SPECIFICATIONS

ENGINE/DRIVETRAIN/AXLE


Engine model	Cummins L9
Type	Diesel 4 cycle, 6 cylinder in-line, water-cooled, wet cylinder lined
Turbocharger	Variable Geometry Turbocharger w/integrated engine braking
Fuel System	Common rail, direct injection
Bore & Stroke	4.49 in. x 5.71 in.
Max. output @ 2,200 rpm	300-360hp
Max. torque @ 1,200 rpm	860-1,150 lb.-ft.
Emissions system	Cooled EGR with Single Module Aftertreatment
Transmission	Allison six speed automatic with neutral at stop (NAS) and coast mode
Driveline	Dana Spicer SPL 170
Front & rear axles	Dana Spicer (Rear-multiple axle ratios available)

ELECTRICAL EQUIPMENT

Batteries	<input type="checkbox"/> STD Two, parallel connection, 1200 CCA (GR 31)
	<input type="checkbox"/> OPT battery choices <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4
Alternator	<input type="checkbox"/> STD 12V, 130A, Delco (brush)
	<input type="checkbox"/> OPT 12V, 135A (brushless) <input type="checkbox"/> OPT 180A (brush) <input type="checkbox"/> OPT 200A (brush)
Starter	STD Denso-12V, 6.4kW

TANKS

Fuel Tank (gallons)	<input type="checkbox"/> STD single 50 <input type="checkbox"/> OPT single 90
	<input type="checkbox"/> OPT dual 50*
DEF tank (gallons)	<input type="checkbox"/> STD 7.4 <input type="checkbox"/> OPT 15.5 (w/ 4 Battery Option ONLY)

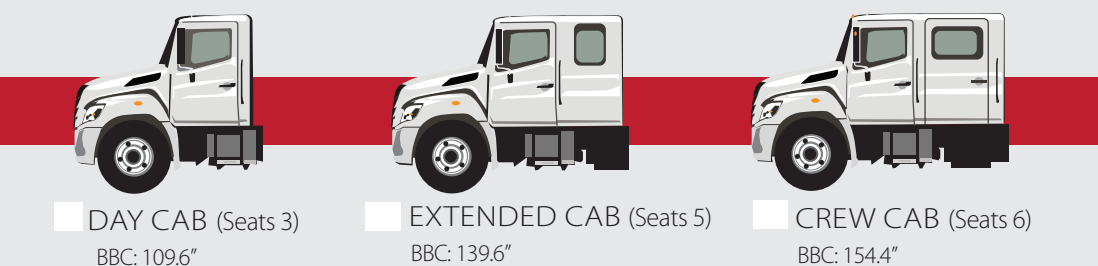

STRAIGHT TRUCK															TRACTOR		
4x2 Wheelbase (in.)	152	175	181	187	196	205	212	217	235	253	271	280	289	298	304	152	162
Day	84.8	107.8	113.8	119.8	128.8	137.8	144.8	149.8	167.8	185.8	203.8	212.8	221.8	230.8	236.8	84.8	97.8
Cab to axle (in.)									119.8	137.8	155.8				206.8		
Crew									84						141		

STRAIGHT TRUCK															TRACTOR		
6x4 Wheelbase (in.)	182	194	214	233	261	265	275	281							182	194	
Day	114.8	126.8	146.8	165.8	193.8	197.8	207.8	213.8							114.8	126.8	
Cab to axle (in.)																	
Extended															167.8		
Crew															121		

6x4 axle configuration is only available as an XL8

For additional options and specifications please visit your local Authorized Hino Trucks Dealer. Are you a body company? Additional information @ hinobodybuilder.com

XL7 GVWR: 33,000 LBS.

WEIGHT CAPACITIES: Front axle range:12,000-14,600 lbs. Rear axle range: 21,000-23,000 lbs.

Engine HP	<input type="checkbox"/> STD L9 300hp <input type="checkbox"/> OPT L9 330hp <input type="checkbox"/> OPT L9 360hp
Transmission model	<input type="checkbox"/> STD 3000 RDS <input type="checkbox"/> OPT 3000 HS <input type="checkbox"/> OPT 3500 RDS
Brakes	<input type="checkbox"/> STD Air S-cam drum <input type="checkbox"/> OPT Air disc
Front axle/susp. lbs.	<input type="checkbox"/> STD 12,000 <input type="checkbox"/> OPT 13,200 <input type="checkbox"/> OPT 14,000 <input type="checkbox"/> OPT 14,600 <input type="checkbox"/> OPT 16,000
Rear susp. type	<input type="checkbox"/> STD Spring multi leaf <input type="checkbox"/> OPT 21K Hendrickson air susp. <input type="checkbox"/> OPT Shock absorber <input type="checkbox"/> OPT Sub leaf helper spring <input type="checkbox"/> OPT Rubber helper spring <input type="checkbox"/> OPT 23K Hendrickson air susp.
Rear axle/susp. lbs.	<input type="checkbox"/> STD 21,000 <input type="checkbox"/> OPT 23,000
Wheel type (22.5")	<input type="checkbox"/> STD Powder coated white <input type="checkbox"/> OPT Aluminum Accuride or Alcoa
Frame yeild strength	<input type="checkbox"/> STD 120K PSI(1.9 M RBM) <input type="checkbox"/> OPT 120K PSI(2.6 M RBM) <input type="checkbox"/> OPT Double frame 120K PSI(3.8 M RBM)

XL8 GVWR: 34,200-66,000 LBS.

WEIGHT CAPACITIES: Front axle range:12,000-20,000 lbs. Rear axle range: 21,000-46,000 lbs.

Engine HP	<input type="checkbox"/> STD L9 300hp <input type="checkbox"/> OPT L9 330hp <input type="checkbox"/> OPT L9 360hp
Transmission model	<input type="checkbox"/> STD 3000 RDS <input type="checkbox"/> OPT 3000 HS <input type="checkbox"/> OPT 3500 RDS
Brakes	<input type="checkbox"/> STD Air S-cam drum <input type="checkbox"/> OPT Air disc
Front axle/susp. lbs.	<input type="checkbox"/> STD 12,000 <input type="checkbox"/> OPT 13,200 <input type="checkbox"/> OPT 14,000 <input type="checkbox"/> OPT 14,600 <input type="checkbox"/> OPT 16,000
Rear axle/susp. lbs.	Single Axle (4x2) <input type="checkbox"/> STD 21,000 <input type="checkbox"/> OPT 23,000 Tandem Axle (6x4) <input type="checkbox"/> OPT 40,000 <input type="checkbox"/> OPT 46,000
Rear susp. type	<input type="checkbox"/> STD Spring multi leaf <input type="checkbox"/> OPT Hendrickson COMFORT AIR <input type="checkbox"/> OPT Shock absorber <input type="checkbox"/> OPT Sub leaf helper spring <input type="checkbox"/> OPT Rubber helper spring <input type="checkbox"/> OPT Hendrickson HAULMAAX Rubber <input type="checkbox"/> OPT Hendrickson air susp.
Wheel type (22.5")	<input type="checkbox"/> STD Powder coated white <input type="checkbox"/> OPT Aluminum Accuride or Alcoa
Frame yeild strength	<input type="checkbox"/> STD 120K PSI (1.9 M RBM) <input type="checkbox"/> STD 120K PSI (2.1 M RBM) <input type="checkbox"/> OPT 120K PSI (2.6 M RBM) <input type="checkbox"/> OPT Double frame 120K PSI(3.8 M RBM)

XL SERIES POPULAR OPTIONAL EQUIPMENT

- Allison Fuel Sense Plus / Max
- Anti-siphon device insert in fuel tank
- Differential lock and controls
- Engine idle shutdown 3, 5, 10 minute
- Back-up alarm
- Cab paint, exterior - custom (factory)
- Exhaust system - vertical stack type
- Jacobs engine brake
- Mirrors, fender mounted-chrome (both sides or passenger only)
- Mirrors, outside rearview-chrome
- Mirrors-power heated (available in chrome)
- Convex Passenger side look down mirror
- Power windows and door locks (available with keyless entry)
- Programmable speed limit 65,70 mph
- Trailer brake package
- Rear of cab work light
- SAF Holland FW17 or FW35 fifth wheel (stationary) 24" slide



Battery disconnect & jump start station



Hino Safety Suite



WABCO OnGuardACTIVE™ Collision Mitigation with Adaptive Cruise Control & Electronic Stability Control




WABCO OnLaneALERT™ Lane Departure Warning System

*All features and options are subject to change without notice. **For more model specifications, contact your local Hino dealer.
 *Running change.

Legal Disclaimer
 The equipment and specifications shown are subject to change without notice. The information, content, and materials are presented "as is" at the time of publication, and no representations are made that the content is error-free. ©Hino Motors Sales U.S.A., Inc. All rights reserved. All other marks are trademarks of their respective owners.



Hino Trucks' standard 80,000 PSI frame is among the strongest in the industry, but we also offer an optional 120,000 PSI frame (L7 only) to maintain integrity in the most rugged applications.

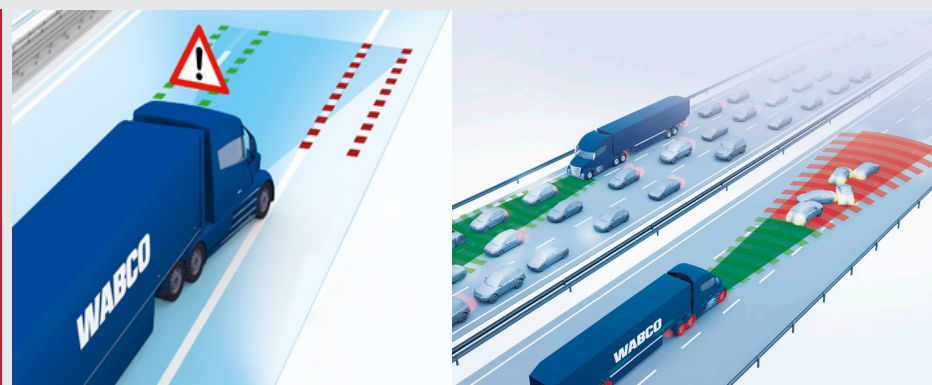

Hino Trucks provides extra-wide door openings, large step surfaces and grab handles to keep drivers safe, but in today's world, that's not enough. With the Hino Active Safety Suite, drivers are safer with the integration of today's cutting edge camera and radar technologies.



We know driver retention is tough, this is why we offer standard equipment such as; Bluetooth Radio w/CD player, Air ride drivers seat, USB charging port, A/C, cruise control, tilt & telescopic steering wheel, will help. That's why its STANDARD.



Part of what makes the L Series great for so many applications is maneuverability and visibility. 55 degree wheel cut is perfect for tight spots in the inner city and a 2,385 sq/in windshield helps drivers see through their work day.